


CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES CARACTÉRISTIQUES / KENNLINIEN


AXIAL 2800 RPM Ø 250

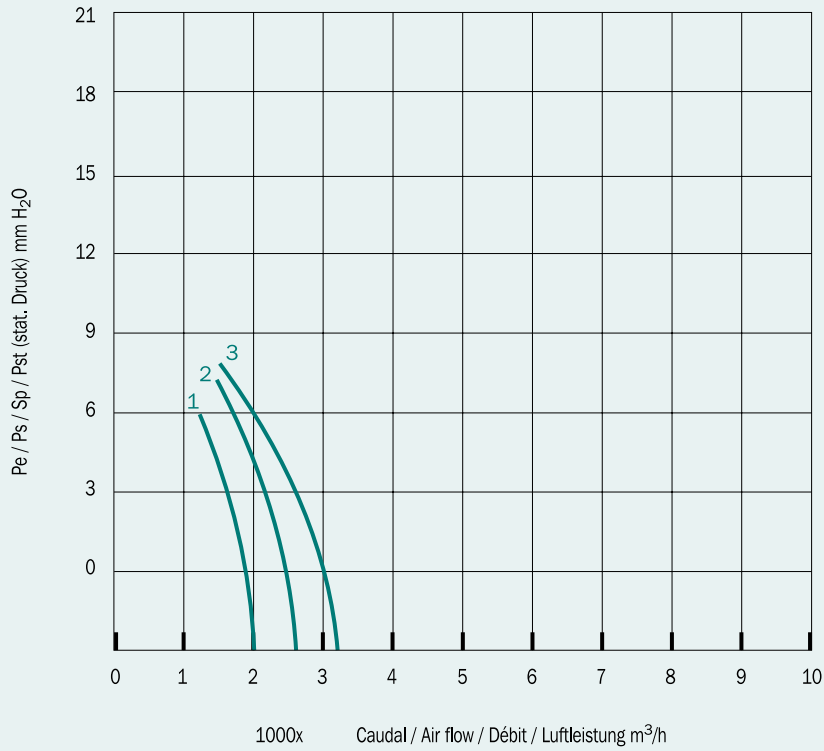

- 1. 2-250 30 (0,18)\*
- 2. 2-250 40 (0,25)\*
- 3. 2-250 45 (0,25)\*

\* Kw

AXIAL / AXIPLUS 1400 RPM Ø 250-450

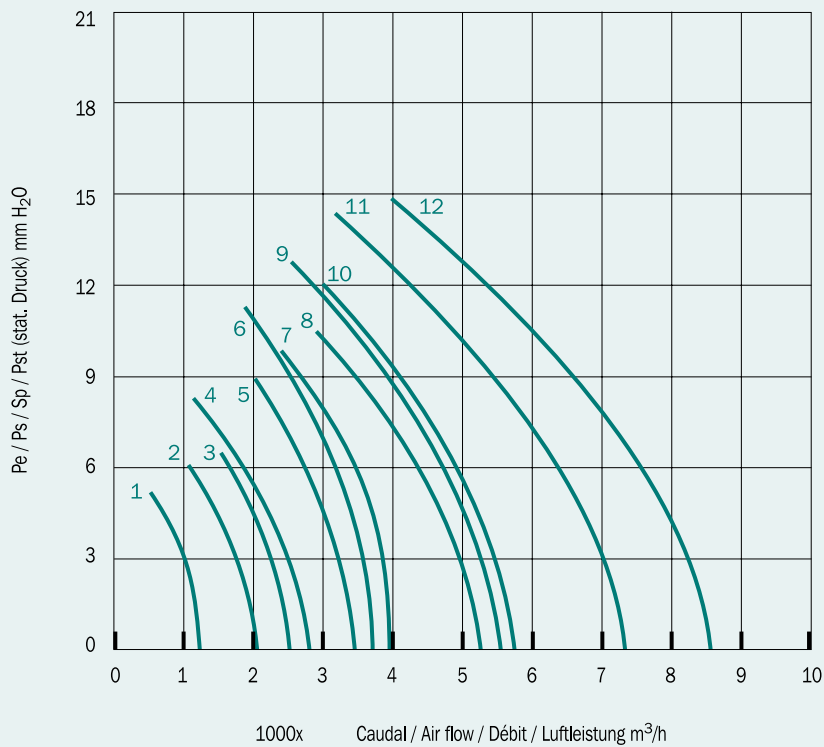


- 1. 4-250 40 (0,06)\*
- 2. 4-315 34 (0,09)\*
- 3. 4-315 45 (0,09)\*
- 4. 4-355 30 (0,09)\*
- 5. 4-355 40 (0,09)\*
- 6. 4-400 30 (0,09)\*
- 7. 4-355 45 (0,12)\*
- 8. 4-400 40 (0,12)\*
- 9. 4-450 30 (0,18)\*
- 10. 4-400 45 (0,18)\*
- 11. 4-450 40 (0,37)\*
- 12. 4-450 45 (0,37)\*

\* Kw

**CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES CARACTÉRISTIQUES / KENNLINIEN**


**AXIAL / AXIPLUS 1400 RPM Ø 500**

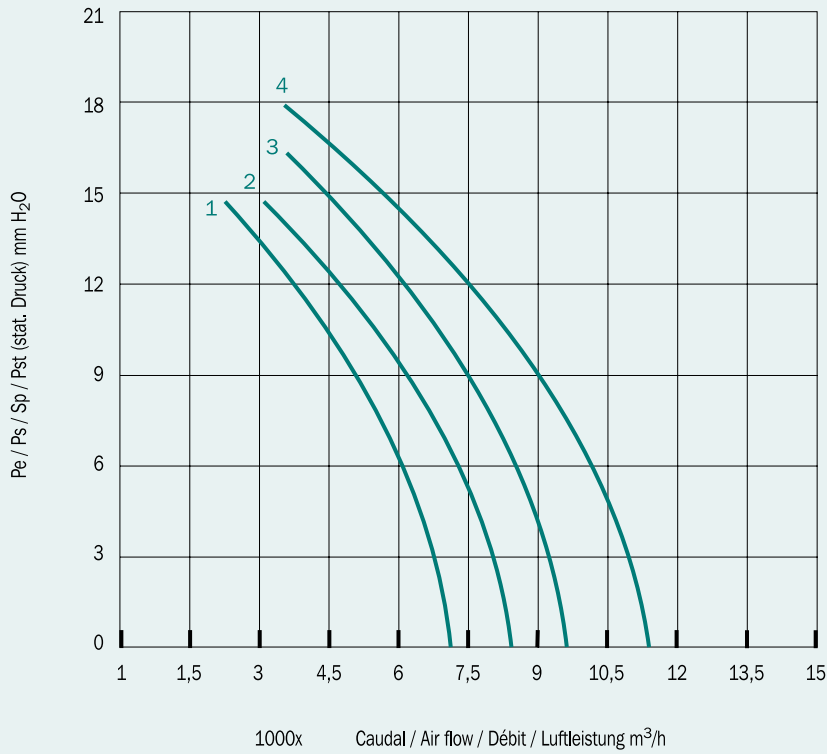

- 1. 4-500 30 (0,18)\*
- 2. 4-500 34 (0,37)\*
- 3. 4-500 40 (0,55)\*
- 4. 4-500 45 (0,75)\*

\* Kw

**AXIAL / AXIPLUS 1400 RPM Ø 560-630**

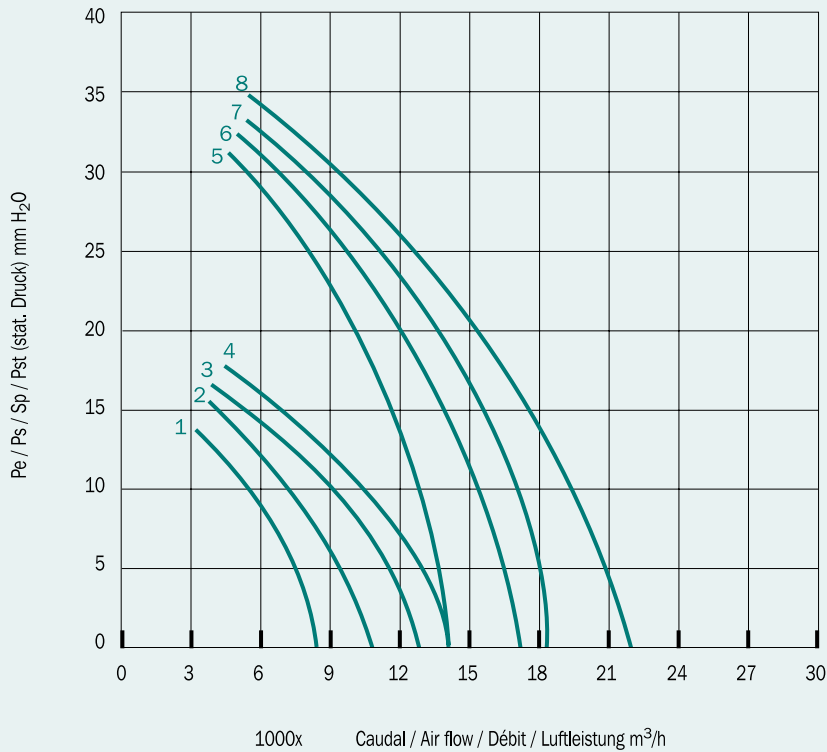


- 1. 4-560 24 (0,37)\*
- 2. 4-560 34 (0,55)\*
- 3. 4-560 40 (0,75)\*
- 4. 4-560 45 (1,1)\*
- 5. 4-630 24 (0,75)\*
- 6. 4-630 34 (1,1)\*
- 7. 4-630 40 (1,5)\*
- 8. 4-630 45 (2,2)\*

\* Kw

CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES CARACTÉRISTIQUES / KENNLINIEN


**AXIAL / AXIPLUS 1400 RPM Ø 710**

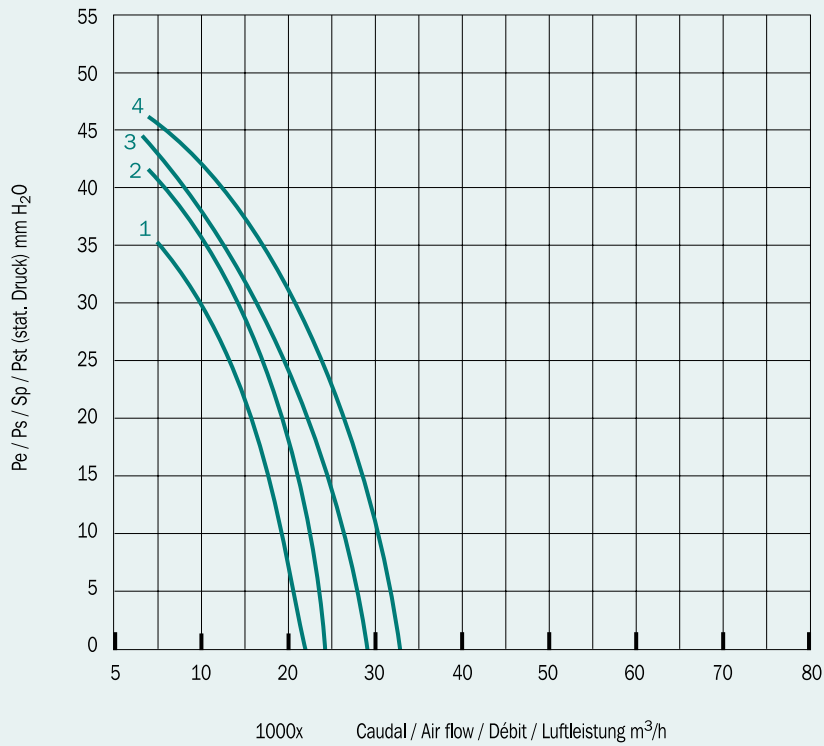

- 1. 4-710 30 (1,15)\*
- 2. 4-710 34 (2,2)\*
- 3. 4-710 40 (3)\*
- 4. 4-710 45 (4)\*

\* Kw

**AXIAL 1400 RPM Ø 800**

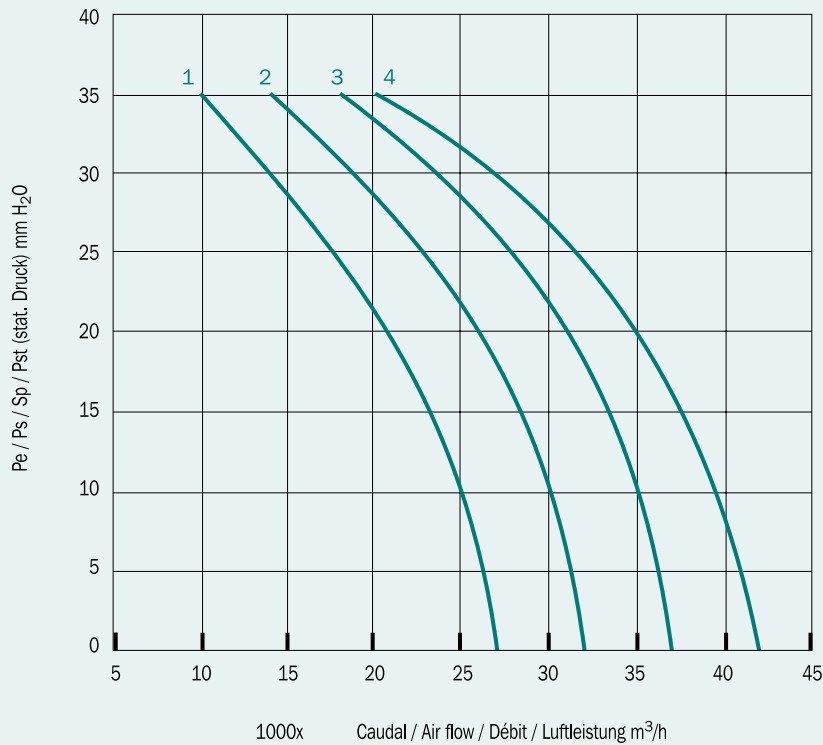


- 1. 4-800 30 (2,2)\*
- 2. 4-800 34 (3)\*
- 3. 4-800 40 (5,5)\*
- 4. 4-800 45 (7,5)\*

\* Kw

**CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES CARACTÉRISTIQUES / KENNLINIEN**


**AXIAL 1400 RPM Ø 900**

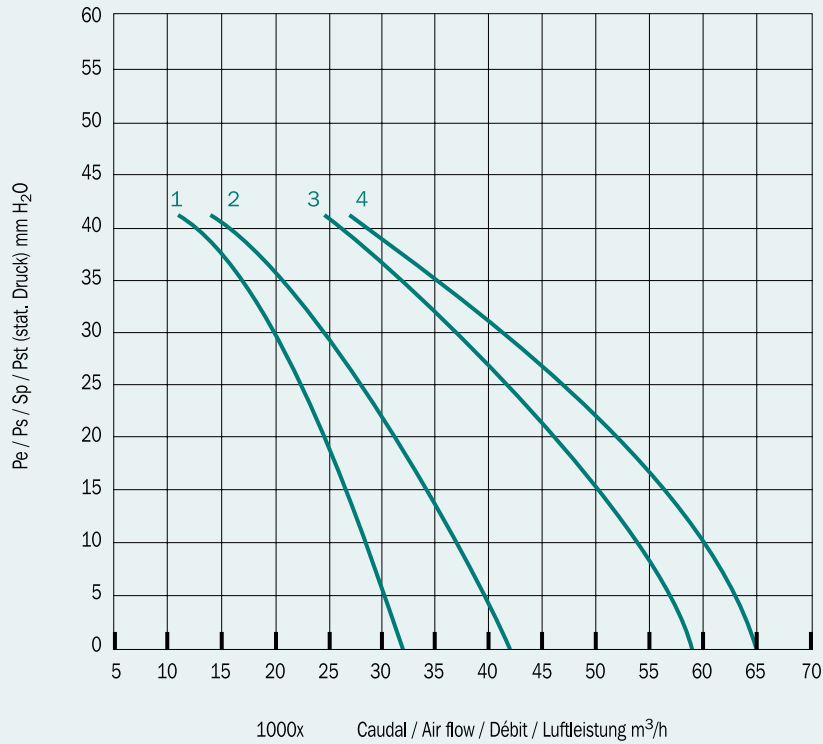

- 1. 4-900 24 (3)\*
- 2. 4-900 30 (4)\*
- 3. 4-900 40 (7,5)\*
- 4. 4-900 45 (11)\*

\* Kw

**AXIAL 1400 RPM Ø 1000**

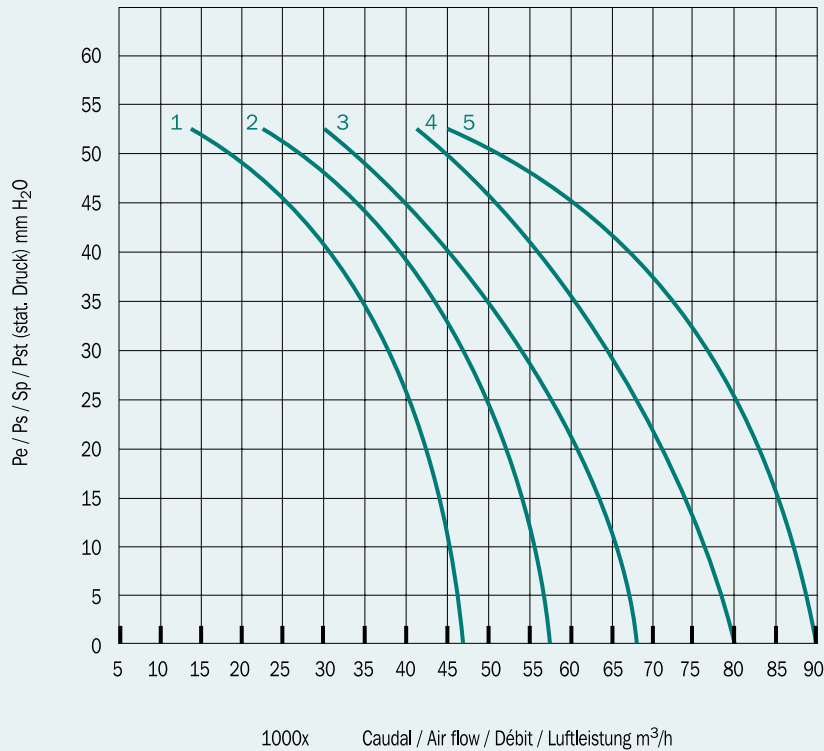


- 1. 4-1000 24 (4)\*
- 2. 4-1000 30 (7,5)\*
- 3. 4-1000 34 (11)\*
- 4. 4-1000 40 (15)\*
- 5. 4-1000 45 (18,5)\*

\* Kw

CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES CARACTÉRISTIQUES / KENNLINIEN


**AXIAL 900 RPM Ø 400**

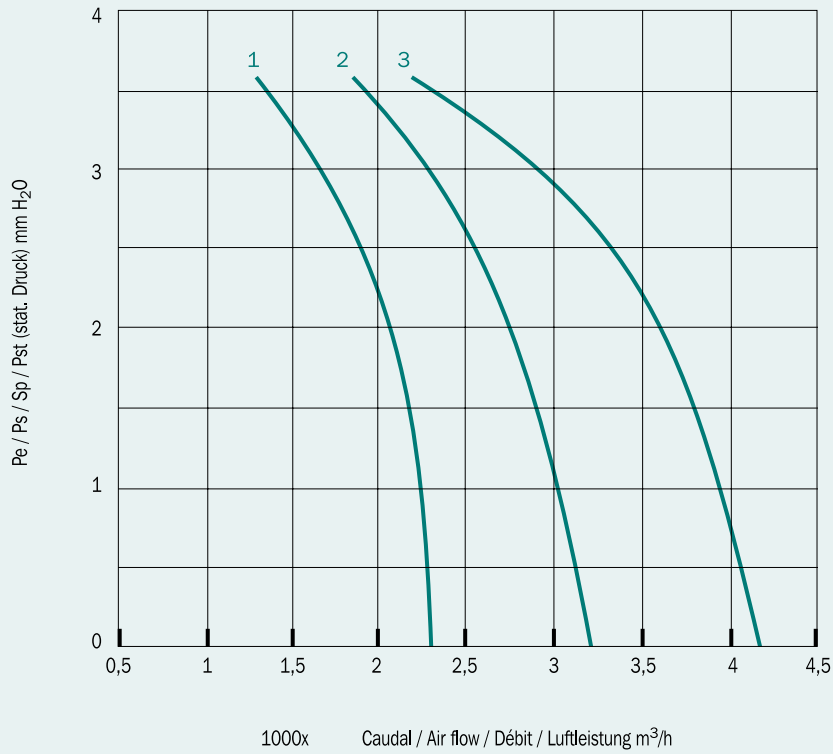

- 1. 6-400 30 (0,09)\*
- 2. 6-400 40 (0,09)\*
- 3. 6-400 45 (0,09)\*

\* Kw

**AXIAL 900 RPM Ø 450**

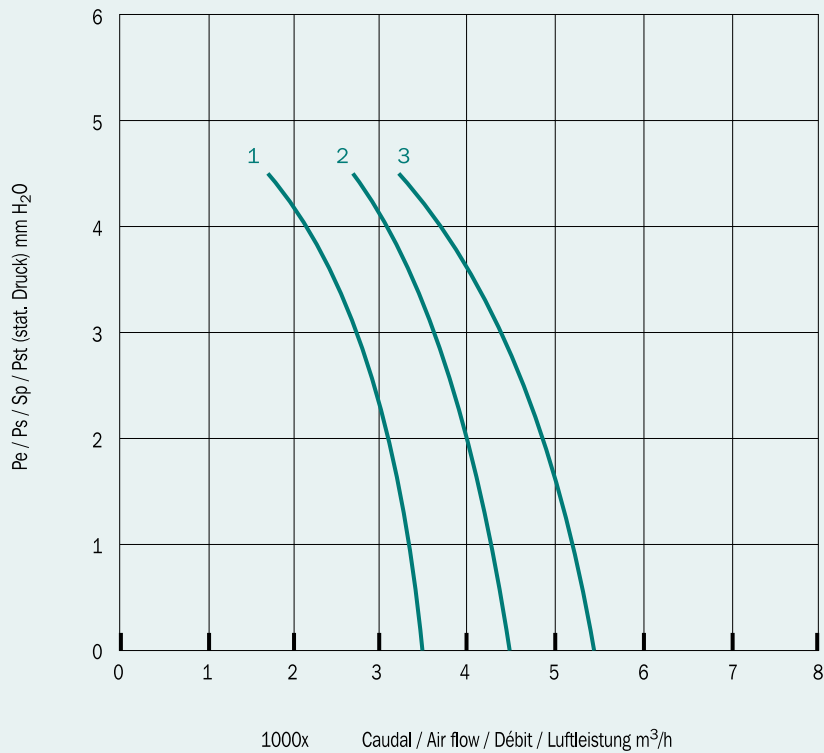


- 1. 6-450 30 (0,12)\*
- 2. 6-450 40 (0,12)\*
- 3. 6-450 45 (0,12)\*

\* Kw

**CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES CARACTÉRISTIQUES / KENNLINIEN**


**AXIAL / AXIPLUS 900 RPM Ø 500**

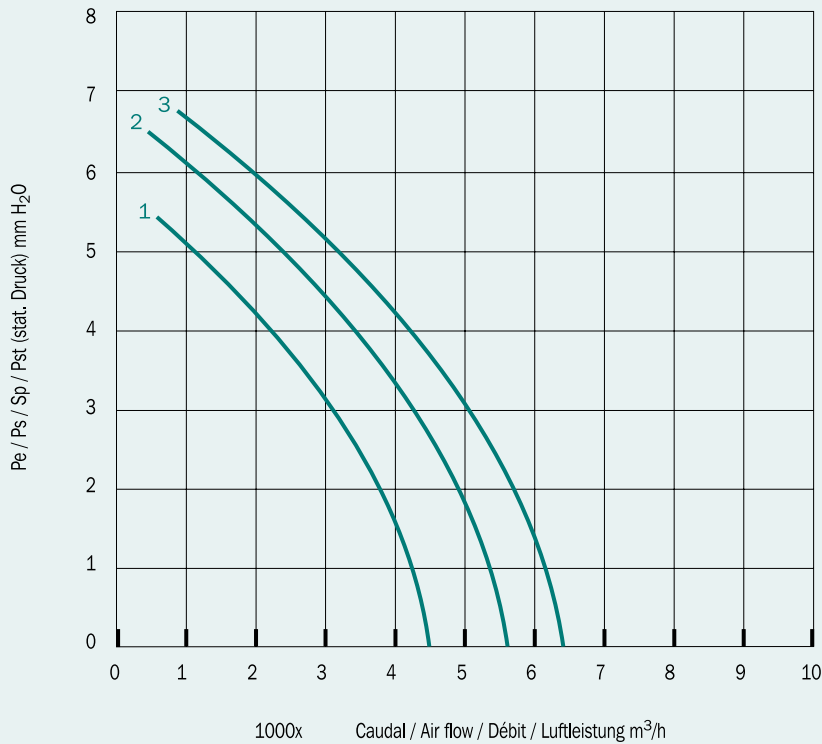

- 1. 6-500 30 (0,18)\*
- 2. 6-500 34 (0,18)\*
- 3. 6-500 40 (0,18)\*

\* Kw

**AXIAL / AXIPLUS 900 RPM Ø 560-630**

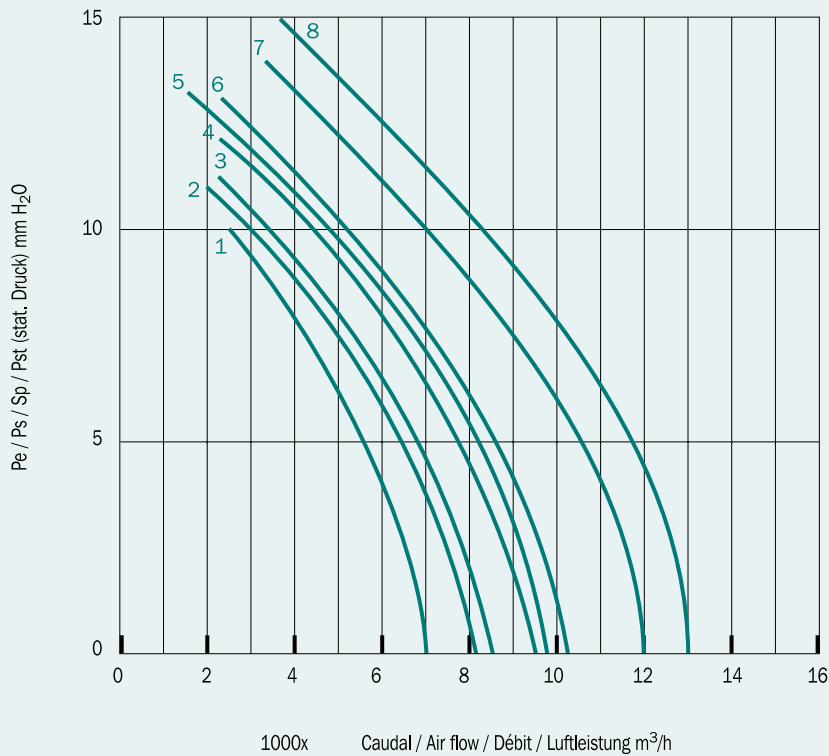


- 1. 6-560 30 (0,12)\*
- 2. 6-560 34 (0,18)\*
- 3. 6-560 40 (0,25)\*
- 4. 6-560 45 (0,37)\*
- 5. 6-630 24 (0,18)\*
- 6. 6-630 30 (0,25)\*
- 7. 6-630 40 (0,37)\*
- 8. 6-630 45 (0,55)\*

\* Kw

**CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES CARACTÉRISTIQUES / KENNLINIEN**


**AXIAL / AXIPLUS 900 RPM Ø 710**

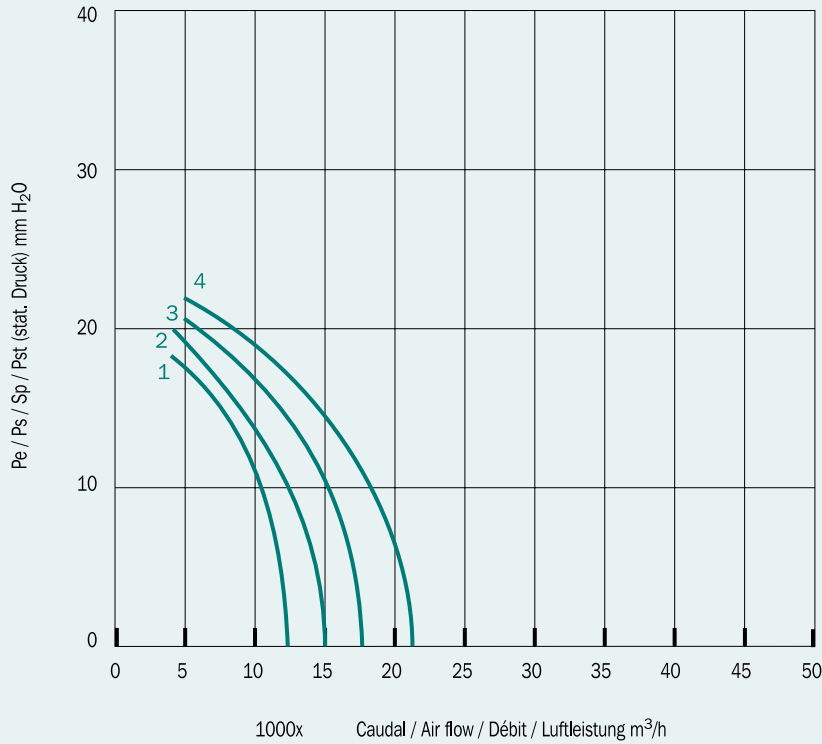

- 1. 6-710 30 (0,37)\*
- 2. 6-710 34 (0,55)\*
- 3. 6-710 40 (0,75)\*
- 4. 6-710 45 (1,1)\*

\* Kw

**AXIAL 900 RPM Ø 800**

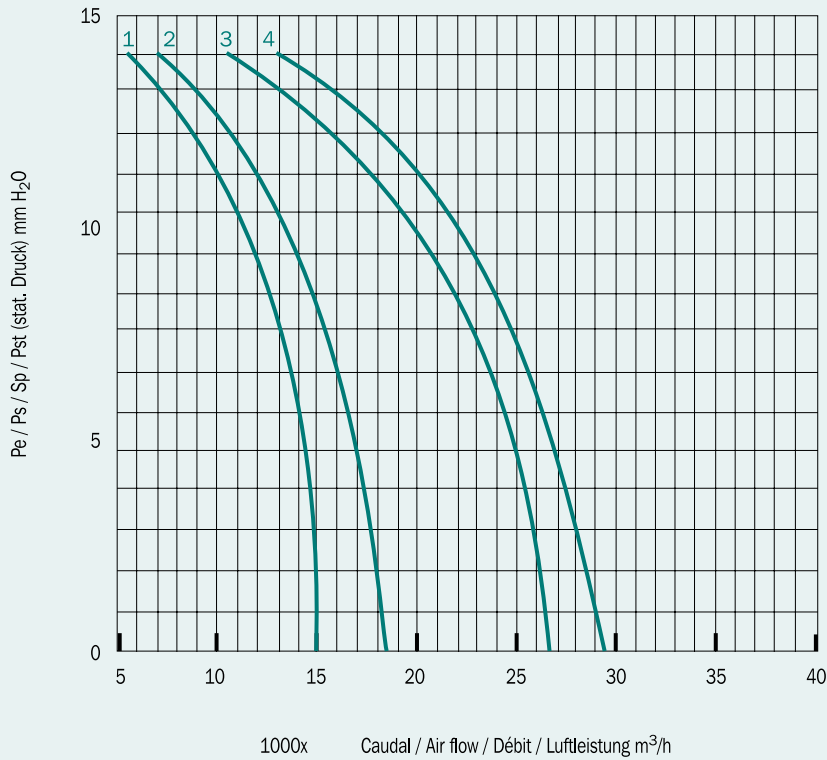


- 1. 6-800 24 (0,37)\*
- 2. 6-800 30 (0,75)\*
- 3. 6-800 40 (1,1)\*
- 4. 6-800 45 (1,5)\*

\* Kw

**CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES CARACTÉRISTIQUES / KENNLINIEN**


**AXIAL 900 RPM Ø 900**

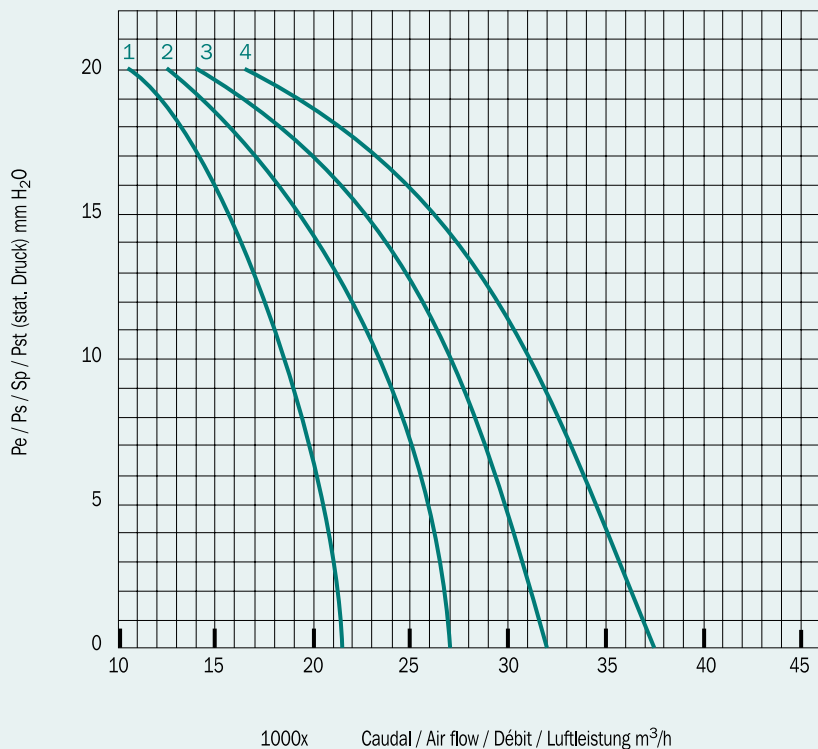

- 1. 6-900 24 (0,75)\*
- 2. 6-900 30 (1,1)\*
- 3. 6-900 34 (1,5)\*
- 4. 6-900 40 (2,2)\*

\* Kw

**AXIAL 900 RPM Ø 1000**

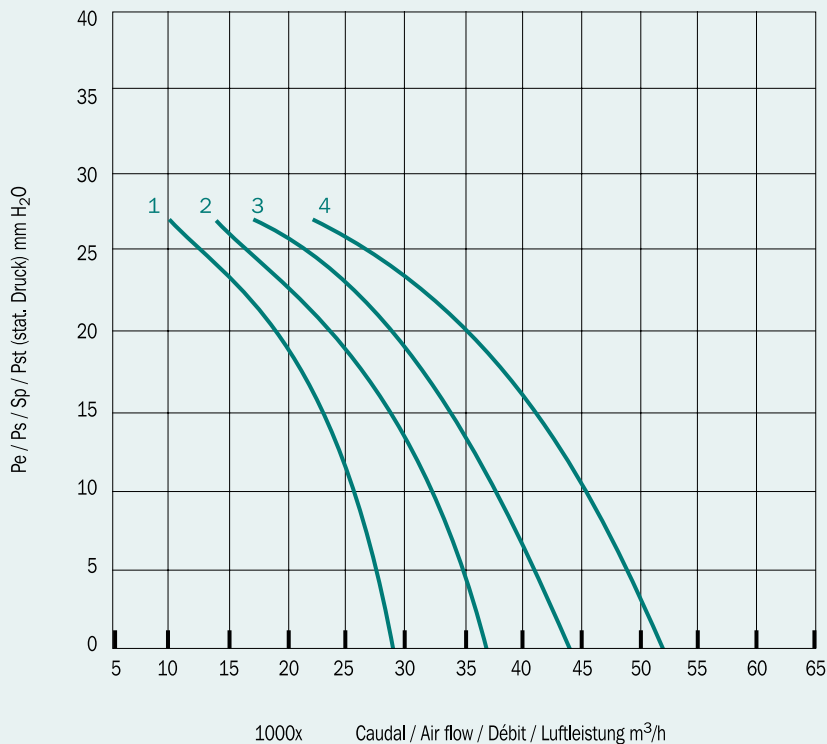


- 1. 6-1000 24 (1,1)\*
- 2. 6-1000 30 (2,2)\*
- 3. 6-1000 34 (3)\*
- 4. 6-1000 40 (4)\*

\* Kw

CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES CARACTÉRISTIQUES / KENNLINIEN


AXIAL 700 RPM Ø 800

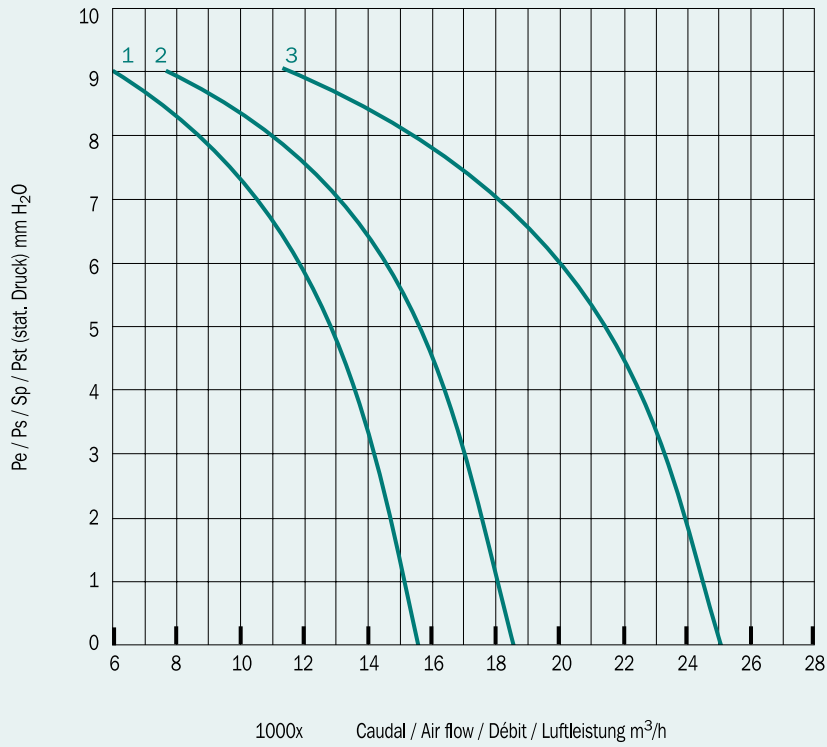

- 1. 8-800 30 (0,37)\*
- 2. 8-800 34 (0,55)\*
- 3. 8-800 45 (1,1)\*

\* Kw

AXIAL 700 RPM Ø 900

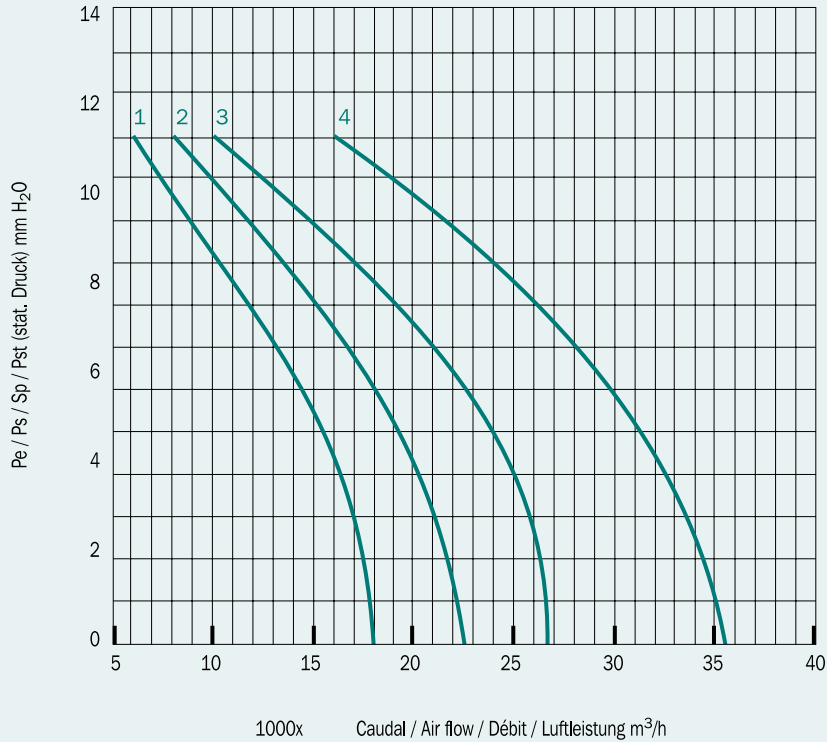


- 1. 8-900 24 (0,37)\*
- 2. 8-900 30 (0,75)\*
- 3. 8-900 34 (1,1)\*
- 4. 8-900 45 (1,5)\*

\* Kw

**CURVAS CARACTERÍSTICAS / PERFORMANCE DATA / COURBES CARACTÉRISTIQUES / KENNLINIEN**

**AXIAL 700 RPM Ø 1000**

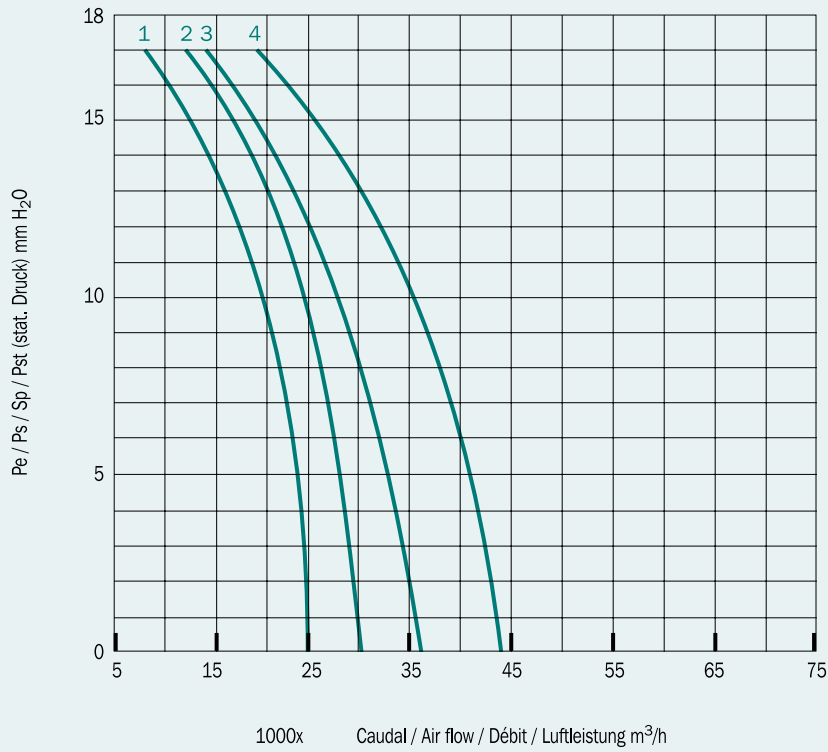

- 1. 8-1000 24 (0,75)\*
- 2. 8-1000 30 (1,1)\*
- 3. 8-1000 34 (1,5)\*
- 4. 8-1000 40 (2,2)\*

\* Kw